



MASTER PL-C 4 Pin

MASTER PL-C 26W/840/4P 1CT/5X10BOX

Energy-saving compact fluorescent lampsCompact long-arc low-pressure mercury discharge lampEnvelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- · Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		LLMF 400
Cap base	G24Q-3 [G24q-3]	LLMF 600
Life to 50% failures preheat (nom.)	13000 h	LLMF 800
LSF preheat 2,000 hours rated	99 %	
LSF preheat 4,000 hours rated	98 %	Operatir
LSF preheat 6,000 hours rated	97 %	Power (Ra
LSF preheat 8,000 hours rated	90 %	Lamp curi
Light Technical		Tempera
Colour Code	840 [CCT of 4,000 K]	Design te
Lamp Luminous Flux 25°C EL (Nom)	1800 lm	
Lamp Luminous Flux (Nom)	1800 lm	Controls
Colour Designation	Cool White (CW)	Dimmable
Colour Temperature, horizontal (Nom)	4000 K	
Lamp Luminous Efficacy EM (Nom)	67 lm/W	Mechani
Colour Rendering Index,horiz (Nom)	82	Cap-base
LLMF 2000 h Rated	92 %	

87 %
83 %
81 %
26.0 W
0.335 A
28 °C
Yes
4P


Datasheet, 2020, March 19 data subject to change

MASTER PL-C 4 Pin

Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	29 kWh
Product Data	
Full product code	871150062336200
Order product name	MASTER PL-C 26W/840/4P 1CT/5X10BOX
EAN/UPC – product	8711500623362

Order code	927907384002
SAP numerator – quantity per pack	1
Numerator – packs per outer box	50
Material no. (12 NC)	927907384002
Net Weight (Piece)	60.400 g
ILCOS code	FSQ-26/40/1B-E-G24q=3

Dimensional drawing




PL-C 26W/840/4P


Product

MASTER PL-C 26W/840/4P 1CT/5X10BOX

Photometric data

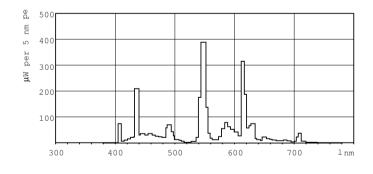




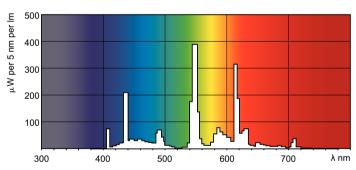


Lightcolour /840

MASTER PL-C 4 Pin

Lifetime

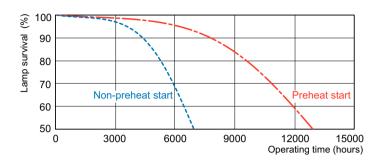



LDLE_PLC4P_0001-Life expectancy diagram

LDLE_PLC4P_0002-Life expectancy diagram



LDLM_PLC4P_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.